



## INSTALLATION INSTRUCTIONS

type: AURA (P3,P4,P5), DRACO (P3,P4,P5), CRATER (P3,P4,P5), EDNA (P3,P4,P5)

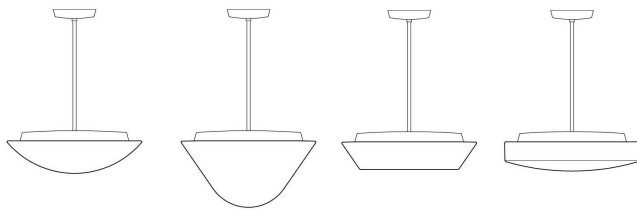


The luminaire can be used only as ceiling.

1. by pulling the shade loosen the shade from the fitting

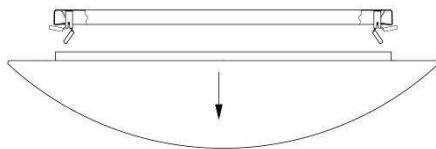


2. assembly fixture and hanging rod:

- unscrew/remote components on the hanging rod from side where there is a connection with fixture
- put the lower cover on
- \*take LED module out of the holders 1 → 2




d. screw/add components and fixture in the order shown:

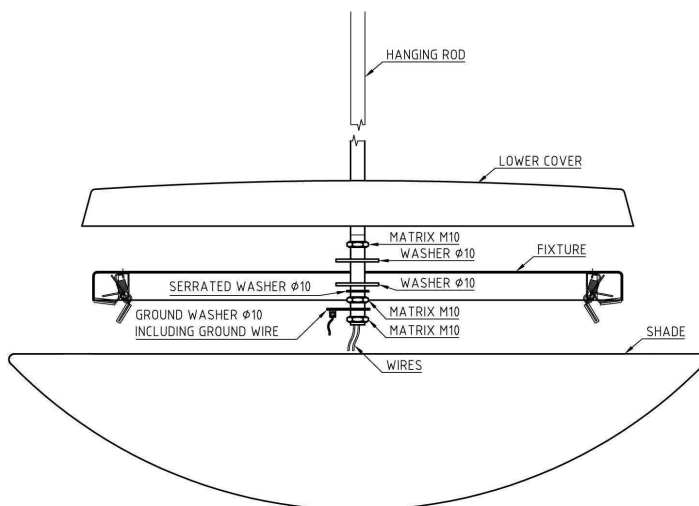

e. connect the cable conductors, grounding wires hanging rod into the terminal

f. \*insert LED module back into the brackets in the original position and snap into the brackets

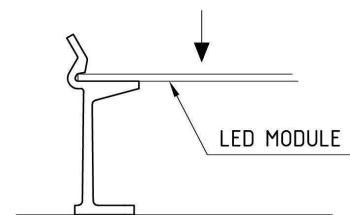

3. check if the electrical supply is switched off

4. loosen the detent screw and dislocate the upper cover down

5. bore the holes in the ceiling according to base assembly plate


6. extend the input cable through the hole in the assembly bowl and fix the bowl to the ceiling by using screws

7. connect the input conductors in the terminal block

8. move the cover bowl to the ceiling and the detent screw

9. \*\*install the light source (see label on the luminaire)

10. put the shade on a → b → c

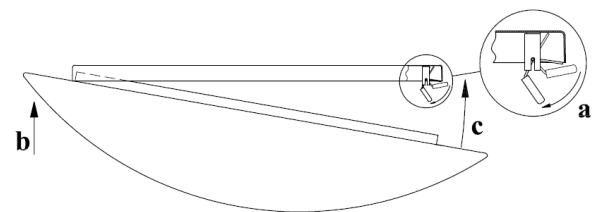

\* Apply when install lights with LED module L13A, L14A.

**CAUTION when handling the LED module and feeder cables to the LED module! Do not touch the LEDs!**

\*\* Apply when install the lights with incandescent or fluorescent source.

### Electrical installation and safety :

Generally it is necessary to follow the EU regulations. At any revisions or service activity it is necessary to disconnect lighting fitting from the electrical network. Only qualified and experienced personnel must undertake this work.