


ALMA 1,2



TECHNICAL DATA

Light source	LED module Osmont L26B, L27C	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP41	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall, ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]	
			3000K	4000K	3000K	4000K
ALMA 1	LED-1L26B07U1/121.000	8	970	1010	650	680
ALMA 2	LED-2L27C03U2/123.000	17	2120	2240	1380	1460


.000 – 3000K or 4000K

STANDARD:

	Type	Input [W]	Socket	Possibility Sensor (HF)
ALMA 1	IN-12U1/121	60	E27	-
ALMA 2	IN-12U2/123	100	E27	• (1x60W)
	IN-22U2/123	2x60	2xE27	-

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

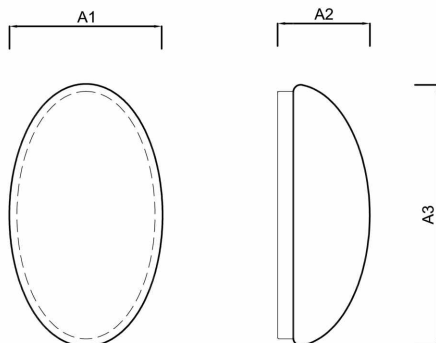

	A1	A2	A3
ALMA 1	150	100	250
ALMA 2	205	140	350

MOUNTING DIMENSIONS [mm]:

<p>ALMA 1</p>		
<p>ALMA 2</p>		
	<p>IN-...</p>	<p>LED-...</p>