


ARAKIS 2,3



TECHNICAL DATA

Light source	LED module Osmont L14B, L14C, L16B, L16C	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP43	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall, ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility		
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)
ARAKIS 2	LED-1L14C03K64/416.000	15	2000	2110	1480	1560	•	•	•
	LED-1L14B07K64/416.000	20	2590	2700	1920	2000	•	•	•
ARAKIS 3	LED-1L16C07K86/417.000	28	3690	3890	2620	2760	•	•	•
	LED-1L16B07K86/417.000	36	4850	5070	3440	3600	•	•	•

.000 – 3000K or 4000K

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K	4000K	[%]	[lm]		
ARAKIS 2	LED-1L14C03K64/416/NK1W.000	15	2000	2110	1480	1560	7	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L14B07K64/416/NK1W.000	20	2590	2700	1920	2000	6	150	3	Ni-Cd (3,6V/1,5Ah)
ARAKIS 3	LED-1L16C07K86/417/NK1W.000	28	3690	3890	2620	2760	4	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L16B07K86/417/NK1W.000	36	4850	5070	3440	3600	3	150	3	Ni-Cd (3,6V/1,5Ah)


.000 – 3000K or 4000K

STANDARD:

	Type	Input [W]	Socket	Possibility
				Sensor (HF)
ARAKIS 2	IN-12K64/416	100	E27	• (1x75W)
	IN-22K64/416	2x75	2xE27	-
ARAKIS 3	IN-32K86/417	3x60	3xE27	• (2x60W)

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

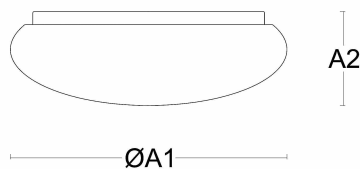

	ØA1	A2
ARAKIS 2	350	135
ARAKIS 3	445	150

MOUNTING DIMENSIONS [mm]:

