


# ARAKIS LE 2,3



## TECHNICAL DATA

Light source	LED module Osmont L14B,L14C,L16B, L16C
Chromacity temperature	3000K, 4000K
CRI	3000K Ra>80, 4000K Ra>80
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)
Power source	Tridonic
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)
Energy class	A++
Input voltage	230V
IP	IP40
Ambient temperature	from -20°C to +30°C
Warranty	5 years
Pendant	3 wires which are used as the power supply as well
Color	silver, black
Shade	three layers glass with matt surface
Shade attachment	with folding holders
Mounting	ceiling
Applications	residential and office spaces

## VARIANTS

LED:



	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility
			3000K	4000K	3000K	4000K	DIM (DALI)
ARAKIS LE2	LED-1L14C03ZLE11/416/L100 x .000	15	2000	2110	1480	1560	-
	LED-1L14B07ZLE11/416/L100 x .000	20	2590	2700	1920	2000	-
ARAKIS LE3	LED-1L16C07ZLE11/417/L100 x .000	28	3690	3890	2620	2760	•
	LED-1L16B07ZLE11/417/L100 x .000	36	4850	5070	3440	3600	•

x – color (S – silver, C – black)  
.000 – 3000K or 4000K

## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

MOUNTING DIMENSIONS [mm]:

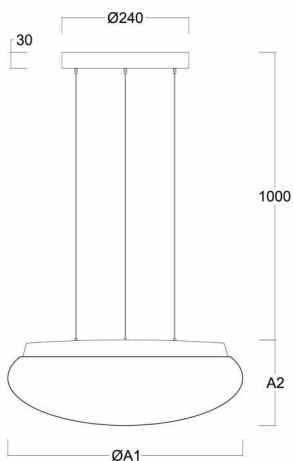

	ØA1	A2
ARAKIS LE2	375	145
ARAKIS LE3	445	160