



AURA 1,2,3,4,5,9



TECHNICAL DATA

Light source	LED module Osmont L11B, L12B, L12C, L14B, L14C, L15B, L15C, L16B, L16C, L18C, L43C	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP43	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall, ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility		
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)
AURA 1	LED-1L11B07K2/040.000	8	970	1010	660	690	-	-	-
	LED-1L12C03K53/042.000	9	1080	1140	730	780	*	*	-
AURA 2	LED-1L12B07K53/042.000	11	1290	1350	880	920	*	*	-
	LED-1L18C03K53/042.000	15	2000	2110	1360	1430	*	*	-
	LED-1L14C03K64/062.000	15	2000	2110	1360	1430	*	*	*
AURA 3	LED-1L14B07K64/062.000	20	2590	2700	1760	1840	*	*	*
	LED-1L15C07K75/072.000	21	2770	2920	2050	2160	*	*	*
AURA 4	LED-1L15B07K75/072.000	29	3880	4050	2870	3000	*	*	*
	LED-1L16C07K86/082.000	28	3690	3890	2550	2680	*	*	*
AURA 5	LED-1L16B07K86/082.000	36	4850	5070	3350	3500	*	*	*
	LED-2L43C07K98/084.000	37	5050	5330	3490	3680	-	*	-
AURA 9	LED-2L43C10K98/084.000	56	7250	7640	5000	5270	-	*	-

.000 – 3000K or 4000K

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K	4000K	[%]	[lm]		
AURA 1	LED-NZ1W/040.000	1	-	170	-	115	100	150	1	LiFePO4 (3,2V/1,5Ah)
AURA 2	LED-1L12C03K53/042/NK1W.000	9	1080	1140	730	780	13	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L12B07K53/042/NK1W.000	11	1290	1350	880	920	11	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L18C03K53/042/NK1W.000	15	2000	2110	1360	1430	7	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 3	LED-1L14C03K64/062/NK1W.000	15	2000	2110	1360	1430	7	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L14B07K64/062/NK1W.000	20	2590	2700	1760	1840	6	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 4	LED-1L15C07K75/072/NK1W.000	21	2770	2920	2050	2160	5	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L15B07K75/072/NK1W.000	29	3880	4050	2870	3000	4	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 5	LED-1L16C07K86/082/NK1W.000	28	3690	3890	2550	2680	4	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L16B07K86/082/NK1W.000	36	4850	5070	3350	3500	3	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 9	LED-2L43C07K98/084/NK1W.000	37	5050	5330	3490	3680	3	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-2L43C10K98/084/NK1W.000	56	7250	7640	5000	5270	2	150	3	Ni-Cd (3,6V/1,5Ah)


.000 – 3000K or 4000K

STANDARD:

	Type	Input [W]	Socket	Possibility Sensor (HF)
AURA 1	IN-12K2/040	60	E27	-
AURA 2	IN-12K52/042	100	E27	* (1x60W)
	IN-22K52/042	2x60	2xE27	-
AURA 3	IN-12K63/062	100	E27	* (1x75W)
	IN-22K63/062	2x75	2xE27	-
AURA 4	IN-22K74/072	2x75	2xE27	* (2x60W)
AURA 5	IN-32K86/082	3x60	3xE27	* (2x60W)
AURA 9	IN-32K98/084	3x75	3xE27	-

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

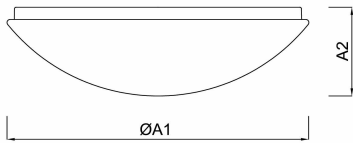

	ØA1	A2
AURA 1	220	110
AURA 2	280	120
AURA 3	350	120
AURA 4	420	125
AURA 5	490	130
AURA 9	590	140

MOUNTING DIMENSIONS [mm]:

AURA 1			
	IN-...	LED-...	LED-NZ1W
AURA 2			
	IN-...	LED-...	
AURA 3			

<p>AURA 4</p>	
<p>AURA 5</p>	
<p>AURA 9</p>	