
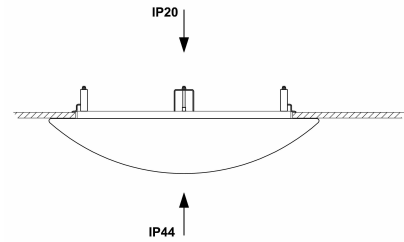



AURA V



TECHNICAL DATA

Light source	LED module Osmont L15C, L16B, L16C, L18C, L43C	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP44	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders (AURA V5, V9), bayonet (AURA V8, V10, V11)	
Mounting	recessed	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [w]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility		
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)
AURA V5	LED-1L16C07KV86/082.000	28	3690	3890	2550	2680	*	*	*
	LED-1L16B07KV86/082.000	36	4850	5070	3350	3500	*	*	*
AURA V8	LED-1L18C02BTV13/013.000	11	1450	1530	940	990	*	*	*
	LED-1L18C03BTV13/013.000	15	1950	2050	1260	1320	*	*	*
AURA V9	LED-2L43C07KV98/084.000	37	5050	5330	3490	3680	-	*	-
	LED-2L43C10KV98/084.000	56	7250	7640	5000	5270	-	*	-
AURA 10	LED-1L15C05BTV14/014.000	15	2040	2150	1330	1400	*	*	*
	LED-1L15C07BTV14/014.000	21	2770	2920	1800	1900	*	*	*
AURA 11	LED-1L16C05BTV15/015.000	20	2720	2870	1770	1870	*	*	*
	LED-1L16C07BTV15/015.000	28	3690	3890	2400	2530	*	*	*

.000 – 3000K or 4000K

LED emergency combined:

	Type	Input [w]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K	4000K	[%]	[lm]		
AURA V5	LED-1L16C07KV86/082/NK1W.000	28	3690	3890	2550	2680	4	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L16B07KV86/082/NK1W.000	36	4850	5070	3350	3500	3	150	3	Ni-Cd (3,6V/1,5Ah)
AURA V8	LED-1L18C02BTV13/013/NK1W.000	11	1450	1530	940	990	10	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L18C03BTV13/013/NK1W.000	15	1950	2050	1260	1320	8	150	3	Ni-Cd (3,6V/1,5Ah)
AURA V9	LED-2L43C07KV98/084/NK1W.000	37	5050	5330	3490	3680	3	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-2L43C10KV98/084/NK1W.000	56	7250	7640	5000	5270	2	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 10	LED-1L15C05BTV14/014/NK1W.000	15	2040	2150	1330	1400	7	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L15C07BTV14/014/NK1W.000	21	2770	2920	1800	1900	6	150	3	Ni-Cd (3,6V/1,5Ah)
AURA 11	LED-1L16C05BTV15/015/NK1W.000	20	2720	2870	1770	1870	5	150	3	Ni-Cd (3,6V/1,5Ah)
	LED-1L16C07BTV15/015/NK1W.000	28	3690	3890	2400	2530	4	150	3	Ni-Cd (3,6V/1,5Ah)


.000 – 3000K or 4000K

STANDARD:

	Type	Input [w]	Socket	Possibility Sensor (HF)
AURA V5	IN-32KV86/082	3x60	3xE27	-
AURA V8	IN-12BTV13/013	100	E27	• (1x60W)
AURA V9	IN-32KV98/084	3x75	3xE27	-
AURA V10	IN-22BTV14/014	2x75	2xE27	-
AURA V11	IN-22BTV15/015	2x75	2xE27	• (2x60W)


DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

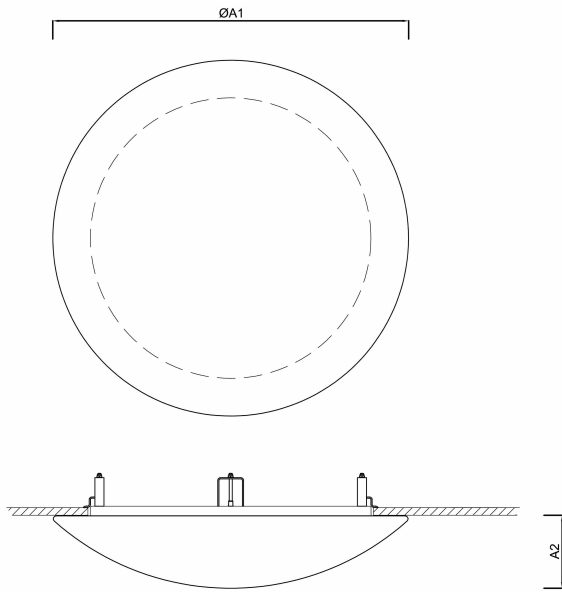

	ØA1	A2
AURA V5	490	110
AURA V8	300	94
AURA V9	590	120
AURA V10	360	104
AURA V11	420	104

MOUNTING DIMENSIONS [mm]:



	ØA
AURA V5	375
AURA V8	246
AURA V9	470
AURA V10	296
AURA V11	346

