



DELIA V1,V2,V3 / DELIA CV1,CV2,CV3



DELIA CV decorative stripe – black matt

TECHNICAL DATA

Light source	LED module Osmont L14B, L14C, L16B, L16C, L20C	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	50 000 hrs / L80B10 (ambient temperature 25°C)	by source
Lifetime of LED	Tridonic	-
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP44	
Ambient temperature	from -20°C to +30°C	
Shock resistance	IK10 (shade PC)	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	opal polycarbonate (PC) or opal polymethylmetacrylate (PM)	
Shade attachment	with folding holders	
Mounting	recessed into ceiling or wall made of solid materials – plasterboard, wood	
Applications	housing constructions (rooms, corridors), cultural premises	



VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Possibility		
			3000K	4000K	3000K		4000K		Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)
					PC	PM	PC	PM			
DELIA V1	LED-1L14C03KNV62/Px22_000	15	2000	2110	1480	1440	1560	1520	*	*	-
	LED-1L14B07KNV62/Px22_000	20	2590	2700	1920	1860	2000	1940	*	*	-
DELIA CV1	LED-1L14C03KNV62/Px22C_000	15	2000	2110	1100	1100	1160	1160	*	*	-
	LED-1L14B07KNV62/Px22C_000	20	2590	2700	1430	1430	1490	1490	*	*	-
DELIA V2	LED-1L16C07KNV83/Px23_000	28	3690	3890	2580	2580	2720	2720	*	*	*
	LED-1L16B07KNV83/Px23_000	36	4850	5070	3400	3400	3550	3550	*	*	*
DELIA CV2	LED-1L16C07KNV83/Px23C_000	28	3690	3890	2030	2030	2140	2140	*	*	*
	LED-1L16B07KNV83/Px23C_000	36	4850	5070	2670	2670	2790	2790	*	*	*
DELIA V3	LED-1L20C07KNV94/Px24_000	37	4750	5010	3140	3140	3310	3310	-	*	-
	LED-1L20C10KNV94/Px24_000	56	6780	7150	4470	4470	4720	4720	-	*	-
DELIA CV3	LED-1L20C07KNV94/Px24C_000	37	4750	5010	2610	2610	2760	2760	-	*	-
	LED-1L20C10KNV94/Px24C_000	56	6780	7150	3730	3730	3930	3930	-	*	-

Px – shade PC or PM
.000 – 3000K or 4000K

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K		4000K		[%]	[lm]		
					PC	PM	PC	PM				
DELIA V1	LED-1L14C03KNV62/Px22/NK1W_000	15	2000	2110	1480	1440	1560	1520	7	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L14B07KNV62/Px22/NK1W_000	20	2590	2700	1920	1860	2000	1940	6	150	3	Ni-Cd (3,6V/1,6Ah)
DELIA CV1	LED-1L14C03KNV62/Px22C/NK1W_000	15	2000	2110	1100	1100	1160	1160	7	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L14B07KNV62/Px22C/NK1W_000	20	2590	2700	1430	1430	1490	1490	6	150	3	Ni-Cd (3,6V/1,6Ah)
DELIA V2	LED-1L16C07KNV83/Px23/NK1W_000	28	3690	3890	2580	2580	2720	2720	4	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L16B07KNV83/Px23/NK1W_000	36	4850	5070	3400	3400	3550	3550	3	150	3	Ni-Cd (3,6V/1,6Ah)
DELIA CV2	LED-1L16C07KNV83/Px23C/NK1W_000	28	3690	3890	2030	2030	2140	2140	4	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L16B07KNV83/Px23C/NK1W_000	36	4850	5070	2670	2670	2790	2790	3	150	3	Ni-Cd (3,6V/1,6Ah)
DELIA V3	LED-1L20C07KNV94/Px24/NK1W_000	37	4750	5010	3140	3140	3310	3310	3	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L20C10KNV94/Px24/NK1W_000	56	6780	7150	4470	4470	4720	4720	2	150	3	Ni-Cd (3,6V/1,6Ah)
DELIA CV3	LED-1L20C07KNV94/Px24C/NK1W_000	37	4750	5010	2610	2610	2760	2760	3	150	3	Ni-Cd (3,6V/1,6Ah)
	LED-1L20C10KNV94/Px24C/NK1W_000	56	6780	7150	3730	3730	3930	3930	2	150	3	Ni-Cd (3,6V/1,6Ah)


Px – shade PC or PM
.000 – 3000K or 4000K

STANDARD:

	Type	Input [W]	Socket	Possibility Sensor (HF)
DELIA V1	IN-12KNV62/PC22	40	E27	•
	IN-12KNV62/PM22	30	E27	•
DELIA CV1	IN-12KNV62/PC22C	40	E27	•
	IN-12KNV62/PM22C	30	E27	•
DELIA V2	IN-22KNV83/PC23	2x40	2xE27	• (2x40W)
	IN-22KNV83/PM23	2x30	2xE27	•
DELIA CV2	IN-22KNV83/PC23C	2x40	2xE27	• (2x40W)
	IN-22KNV83/PM23C	2x30	2xE27	•
DELIA V3	IN-32KNV94/PC24	3x40	3xE27	• (3x40W)
	IN-32KNV94/PM24	3x30	3xE27	•
DELIA CV3	IN-32KNV94/PC24C	3x40	3xE27	• (3x40W)
	IN-32KNV94/PM24C	3x30	3xE27	•


DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

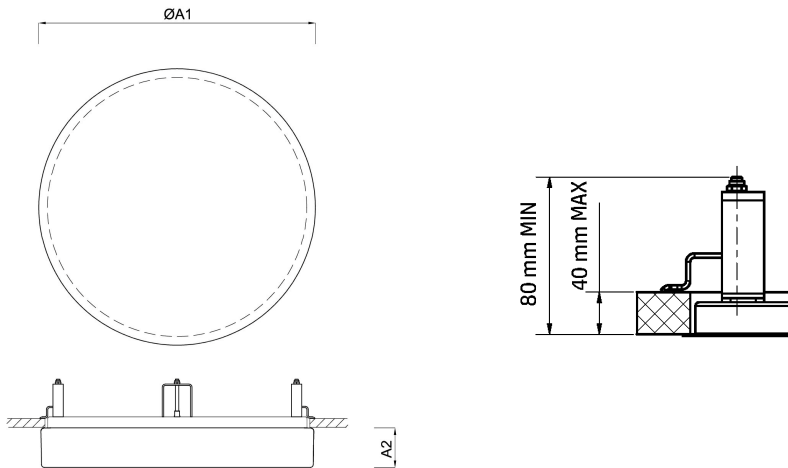

	ØA1	A2
DELIA V1,CV1	300	60
DELIA V2,CV2	400	64
DELIA V3,CV3	500	68

MOUNTING DIMENSIONS [mm]:



	Ø Mounting hole
DELIA V1,CV1	278
DELIA V2,CV2	375
DELIA V3,CV3	470