


ELEKTRA 1



TECHNICAL DATA

Light source	LED modul Osmont L26B	fluorescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	Tridonic
Energy class	A++	by source
Input voltage	230V	
IP	IP54	
Fixture	polypropylene	
Color of fixture	white	
Shade	polypropylene	
Shade attachment	with screw	
Mounting	wall, ceiling	
Applications	industrial premises, corridors, outdoor premises	

VARIANTS

LED:

Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Warranty [yrs]*
		3000K	4000K	3000K	4000K	
LED-1L26B07/IN-64.000	8	970	1010	780	810	5

STANDARD:


Type	Input [W]	Socket	Type of lamp
E-64/13	13	G24q1	TC-DEL
E-64/18	18	G24q2	TC-DEL

.000 – 3000K or 4000

* - warranty on LED modules and power sources

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

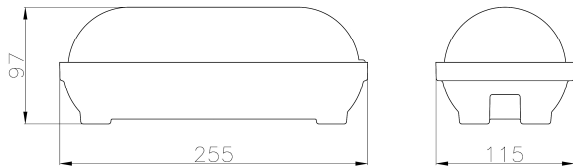

MOUNTING DIMENSIONS [mm]:

