


# FLORA 1



## TECHNICAL DATA

Light source	LED module Osmont L26B	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Power source	Tridonic	-
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP43	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	plastic	
Color of fixture	white (B), black (C), silver (S)	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall, ceiling	
Applications	housing constructions (bathrooms, corridors)	

## VARIANTS


LED:

Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]	
		3000K	4000K	3000K	4000K
LED-1L26B07DU11/124 x.000	8	970	1010	690	720

x – color (B – white, C – black, S – silver)  
.000 – 3000K or 4000K

## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

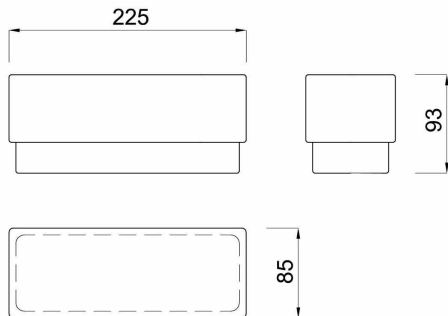

MOUNTING DIMENSIONS [mm]:

