





KUMA S2,S3




KUMA S2 E27



KUMA S2 LED




KUMA S3 E27

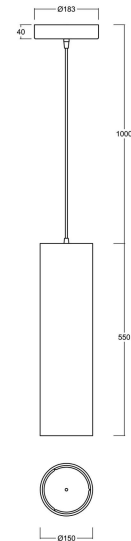

KUMA S3 LED

TECHNICAL DATA

Light source	LED module Osmont L74C, L76C, L77C	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Power source	TCI	-
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP 20	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Hanger	cable	
Color	white (B), black (C)	
Shade	three layers glass with matt surface	
Shade holder	steel holder	
Mounting	ceiling	
Applications	residential and office spaces	

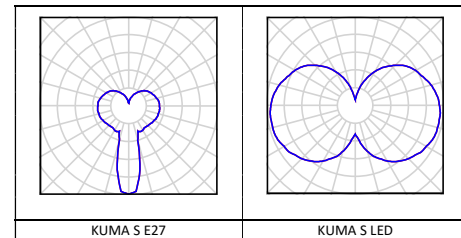

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility
			3000K	4000K	3000	4000K	DIM (DALI)
KUMA S2	LED-6L74/1L77C09/434/L100 x .000	41	5500	5600	4400	4640	•
KUMA S3	LED-6L76/1L77C08/436/L100 x .000	65	8790	9270	7040	7420	•

x – color (B – white, C – black)
.000 – 3000K or 4000K



STANDARD:

	Type	Input [W]	Socket
KUMA S2	ZS11/434/L100 x	40	E27
KUMA S3	ZS11/436/L100 x	60	E27

x – color (B – white, C – black)

DIMENSIONS

MOUNTING DIMENSIONS [mm]:
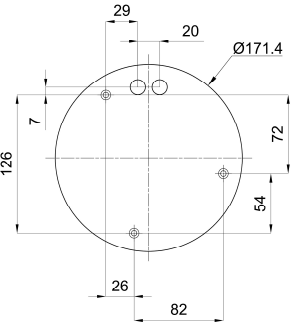
<p>KUMA S E27</p>	 <p>Technical drawing of the KUMA S E27 lamp base. It shows a circular base with a diameter of 121 mm (Ø121). The mounting holes are positioned 20 mm from the center. The distance between the mounting holes is 40 mm. The height of the base is 40 mm. The base has a width of 50 mm on both sides.</p>
<p>KUMA S LED</p>	 <p>Technical drawing of the KUMA S LED lamp base. It shows a circular base with a diameter of 171.4 mm (Ø171.4). The mounting holes are positioned 20 mm from the center. The distance between the mounting holes is 29 mm. The height of the base is 7 mm. The base has a width of 126 mm on the left and 72 mm on the right. The base has a width of 54 mm on the right and 82 mm on the bottom. The base has a width of 26 mm on the left.</p>