


## MIRA



## TECHNICAL DATA

Light source	LED module Osmont L06C	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	-
Power source	Tridonic	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP41	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white (S4), brass (S12), silver (S13), stainless steel polished (S14)	
Shade	three layers glass with matt surface	
Shade attachment	with screw	
Mounting	ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

## VARIANTS

LED:

Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility	
		3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)
LED-SL06C06S6/195/Sx .000	8	3900	4110	3430	3620	•	•


STANDARD:

Type	Input [W]	Socket	Possibility
			Sensor (HF)
IN-12S6/195/Sx	150	E27	• (1x75W)

Sx – decorative rim ([www.osmont.eu](http://www.osmont.eu))  
 .000 – 3000K or 4000K

## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

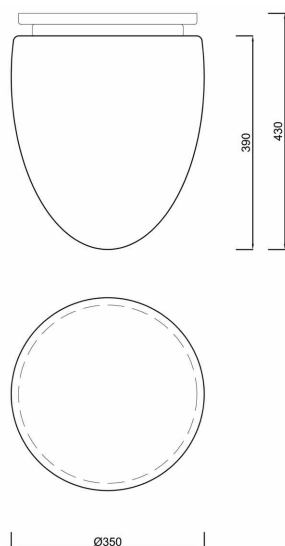

MOUNTING DIMENSIONS [mm]:

