


NARA 1,2



TECHNICAL DATA

Light source	LED module Osmont L41B, L42B	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP43	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility	
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)
NARA 1	LED-1L41B07U41/201.000	15	1940	2030	1320	1380	•	•
NARA 2	LED-1L42B07U42/202.000	20	2590	2700	1680	1760	•	•

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K	4000K	[%]	[lm]		
NARA 1	LED-1L41B07U41/201/NK1W.000	15	1940	2030	1320	1380	7	150	3	Ni-Cd (3,6V/1,6Ah)
NARA 2	LED-1L42B07U42/202/NK1W.000	20	2590	2700	1680	1760	6	150	3	Ni-Cd (3,6V/1,6Ah)


.000 – 3000K or 4000K

STANDARD:

	Type	Input [W]	Socket	Possibility Sensor (HF)
NARA 1	IN-22U41/201	2x30	2xE27	• (1x30W)
NARA 2	IN-22U42/202	2x60	2xE27	• (1x40W)

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

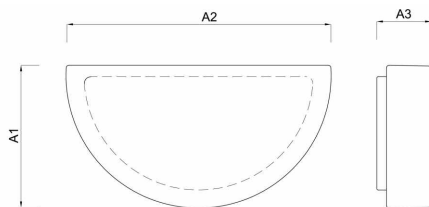

	A1	A2	A3
NARA 1	360	197	86
NARA 2	438	230	90

MOUNTING DIMENSIONS [mm]:

NARA 1			
	IN-...	LED-...	LED-NK1W
NARA 2			