



ORCUS



TECHNICAL DATA

Light source	LED module Osmont L12B	incandescent lamp
Chromacity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Power source	Tridonic	-
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP41	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility Sensor (HF)
		3000K	4000K	3000K	4000K	
LED-1L12B07K56/472/DKx .000	11	1290	1350	1050	1090	•


STANDARD:

Type	Input [W]	Socket	Possibility
			Sensor (HF)
IN-12K56/472/DKx	100	E27	• (1x60W)

DKx – decorative rim (www.osmont.eu)
.000 – 3000K or 4000K

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

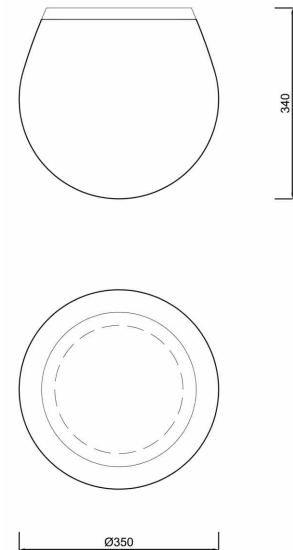

MOUNTING DIMENSIONS [mm]:

