


SAGITA LE2 PC



TECHNICAL DATA

Light source	LED module Osmont L16B, L16C
Chromacity temperature	3000K, 4000K
CRI	3000K Ra>80, 4000K Ra>80
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)
Power source	Tridonic
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)
Energy class	A++
Input voltage	230V
IP	IP40
Ambient temperature	from -20°C to +30°C
Warranty	5 years
Pendant	3 wires which are used as the power supply as well
Color	white
Shade	opal polycarbonate (PC)
Shade attachment	with folding holders
Mounting	ceiling
Applications	residential and office spaces

VARIANTS


LED:

Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility DIM (DALI)
		3000K	4000K	3000K	4000K	
LED-1L16C07ZLE11/PC53/L100 .000	28	3690	3890	2400	2530	•
LED-1L16B07ZLE11/PC53/L100 .000	36	4850	5070	3150	3300	•

.000 – 3000K or 4000K

DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

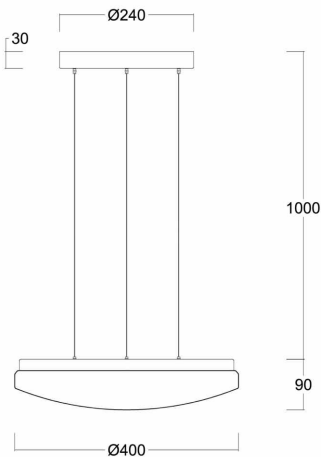

MOUNTING DIMENSIONS [mm]:

