


# SATURN 1,2



## TECHNICAL DATA

Light source	LED module Osmont L61C, L62C
Chromaticity temperature	3000K, 4000K
CRI	3000K Ra>80, 4000K Ra>80
Power source	Tridonic
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)
Energy class	A++
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)
Input voltage	230V
IP	IP41
Ambient temperature	from -20°C to +30°C
Warranty	5 years
Fixture	metal
Color of fixture	white
Shade	three layers glass with matt surface
Shade attachment	with folding holders
Mounting	wall, ceiling
Applications	housing constructions (rooms, corridors), cultural premises

## VARIANTS


LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility
			3000K	4000K	3000K	4000K	DIM (DALI)
SATURN 1	LED-1L61C03KX64/462 .000	18	2270	2390	1540	1630	-
SATURN 2	LED-1L62C07KX86/482 .000	33	4230	4460	2880	3030	•

.000 – 3000K or 4000K

## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

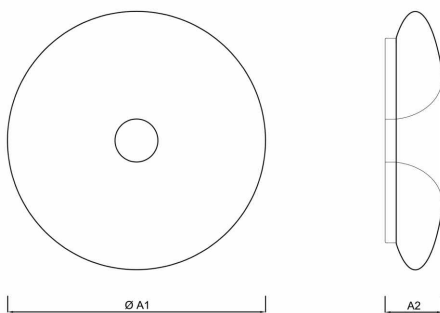

	ØA1	A2
SATURN 1	350	100
SATURN 2	490	125

MOUNTING DIMENSIONS [mm]:

SATURN 1	
SATURN 2	