


## DELIA T2,T3



### TECHNICKÁ DATA

Light source	LED module Osmont L16B, L16C, L53C	incandescent lamp	fluorescent lamp
Chromaticity temperature	3000K, 4000K	by source	by source
CRI	3000K Ra>80, 4000K Ra>80	by source	by source
Power source	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP41		
Shade	opal polycarbonate (PC) or opal polymethylmetacrylate (PM)		
Shade attachment	with folding holders		
Shock resistance	IK10 (shade PC)		
Pendant	stainless steel wire pendants with transparent supply cable in lenght 1000 mm		
Color	white		
Mounting	ceiling		
Applications	industrial premises, corridors		

### VARIANTY

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Possibility DIM (DALI)	Warranty [yrs]*
			3000K	4000K	3000K		4000K			
					PC	PM	PC	PM		
DELIA T2	LED-1L16C07ZT11/Px23/L100.000	28	3690	3890	2580	2580	2720	2720	•	5
	LED-1L16B07ZT11/Px23/L100.000	36	4850	5070	3400	3400	3550	3550	•	5
DELIA T3	LED-3L53C07ZT11/Px24/L100.000	35	4750	5010	3140	3140	3310	3310	•	5
	LED-3L53C10ZT11/Px24/L100.000	53	6780	7150	4470	4470	4720	4720	•	5

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K		4000K		[%]	[lm]			
					PC	PM	PC	PM					
DELIA T2	LED-1L16C07ZT11/Px23/L100/NK1W.000	28	3690	3890	2580	2580	2720	2720	4	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L16B07ZT11/Px23/L100/NK1W.000	36	4850	5070	3400	3400	3550	3550	3	150	3	Ni-Cd (3,6V/1,6Ah)	5
DELIA T3	LED-3L53C07ZT11/Px24/L100/NK1W.000	35	4750	5010	3140	3140	3310	3310	3	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-3L53C10ZT11/Px24/L100/NK1W.000	53	6780	7150	4470	4470	4720	4720	2	150	3	Ni-Cd (3,6V/1,6Ah)	5

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility
					DIM (DALI)
DELIA T2	IN-22ZT11/PC23/L100	2x40	2xE27	-	-
	IN-22ZT11/PM23/L100	2x30	2xE27	-	-
	E-26ZT11/Px23/L100	2x26	2xG24q3	TC-DEL	•
DELIA T3	IN-32ZT11/PC24/L100	3x40	3xE27	-	-
	IN-32ZT11/PM24/L100	3x30	3xE27	-	-
	E-46ZT11/Px24/L100	4x26	2xG24q3	TC-DEL	•


Px – shade PC or PM

.000 – 3000K or 4000

\* - warranty on LED modules and power sources

**DIMENSIONS**

DIMENSIONS OF LUMINAIRE [mm]:

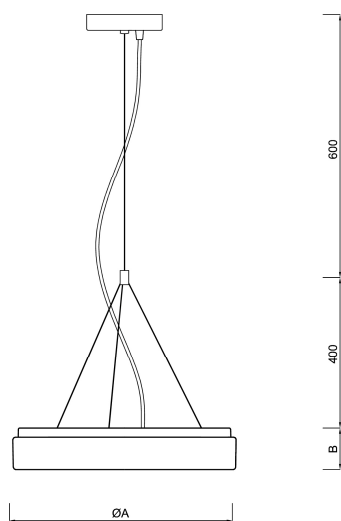

	ØA	B
DELIA T2	400	80
DELIA T3	500	85

MOUNTING DIMENSIONS [mm]:

